

BRONCO

In addition to the TimberLab range, we have developed a principle for making wall luminaires.

This allows all lighting to be done in one style. For lighting, you can choose only light upwards, only down or lighting on both sides. Thanks to the clever suspension system, the luminaire can be easily hung up without visible screws. First the suspension system is attached to the wall and then connected, after which the wooden element can be "hooked" into it. Then, finally, one bolt to secure the wooden element against, for example, theft.




SPECIFICATIONS

- **Thickness:** 200 mm
- **Wood type:** Chestnut
- **IP class:** IP54
- **Voltage:** 230 volts
- **Power:** 2.4/3.6Watt (1/2 x LED)
- **Lumen output per LED module:** 2,700K = 120 lm
4,000K = 150 lm
amber = 82 lm
- **Beam angle:** The LED module has a beam angle of 120 degrees.
- **Lifespan:** Every type of wood has its own durability rating. More information about this can be found under "Types of wood" & "Sustainability". The LED module has an expected lifespan of 100,000 hours.
- **Lighting data:** Lighting data available on request.

OPTIONS

- **Quality mark:** PEFC
- **Light colour:** Available in 2,700, 4,000 K and amber 593 nm.
- **Number of LED modules:** Light upward, light downward or both.
- **Variations:** At Timberlab, every fixture is carefully produced for you. In addition to the standard options, we are happy to create variations for your application. Think of a different height angle, for example.

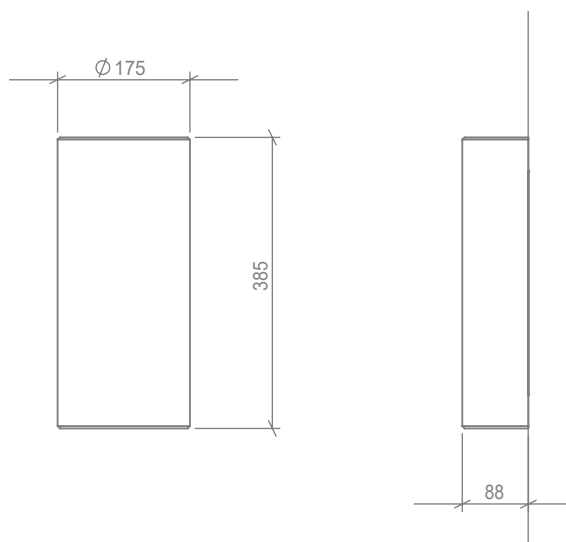

| | | |
|----------|--------|---------|
| | weight | CO2 |
| | | storage |
| Chestnut | 5 kg | 8 kg |



Only products indicated with the FSC® claim are FSC certified and come with our FSC-certificate number NC-COC-029615-KE. Only products indicated with the PEFC™ claim are 100% PEFC certified and come with our PEFC-certificate number NC-PEFC/COC-029615-FJ.